


MAC MACHINE—BATTERY CHARGER OPTION

Features:

- Requires Standard Base Machine
- 10 Amps per Bank
- 2 isolated outputs
- Selectable AGM, GEL or Wet Cell (each bank)
- Water resistant
- Onboard Mounting
- Tri Color LED's for easy monitoring
- Fully automatic, will not overcharge.
- Float mode
- Output cable length 4' each
- Input cable length 6'
- Waterproof & Easy Install
- Optimal 3 Step Charging
- 2 Fully Isolated Outputs
- Built-in Mode Indicators
- Spark Free Hook Up
- Demand Sensing
- Reverse Polarity Protection
- Short Circuit Protection
- Thermal Protection
- 2 years Warranty

Microprocessor controlled, 3 stage electronic switching battery charger.

Unlike an old style trickle charger, this unit will not boil off the electrolyte on a properly functioning battery and having it included on your MAC Machine saves you the time and hassle of dragging a trickle charger out and hooking it up.

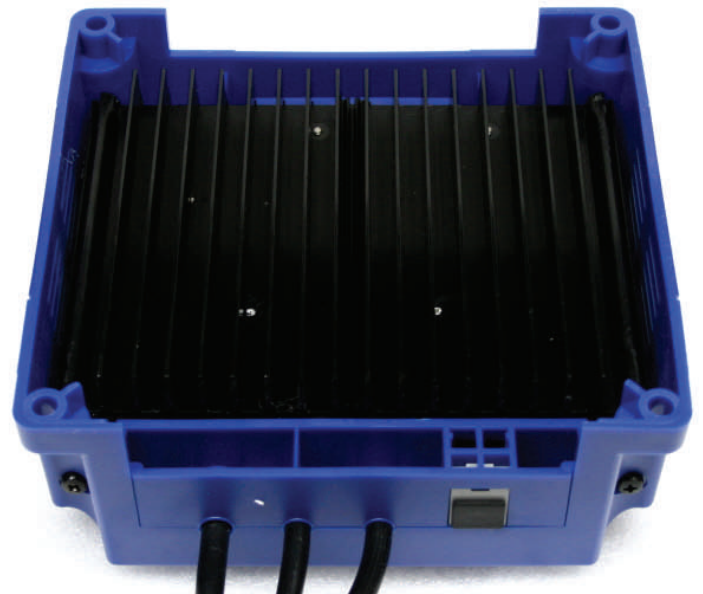

ADDITIONAL OPTIONAL ATTACHMENTS:

- | | |
|---------------------------------|--------|
| * Soft thatching tines in front | \$350 |
| * 7' finishing broom | \$280 |
| * 6' Steel drag mat | \$265 |
| * 6' cocoa mat | \$345 |
| * Laser level receiver uprights | \$275 |
| * Hard Tines in front | \$375 |
| * Dbl. 3' folding grader blades | \$1385 |
| * Core Aeration attachment | \$2850 |

BATTERY CHARGER PRICE:
\$285.00